


Grille incurvée

Classe: C 250
Norme: EN 124

Pour parkings, trottoirs et espaces privatifs
Ouverture à l'aide d'un pic, pioche ou crochet

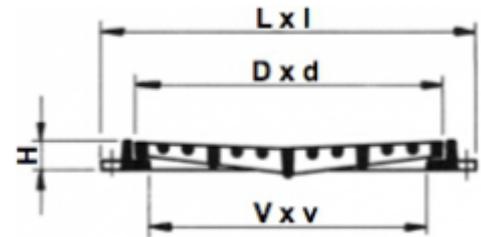

REF.	L x l	D x d	V x v	H	cm2	kg
523-4-S	400x400	348x348	300x300	32	545	12
523-5-S	500x500	447x447	400x400	32	927	20
523-6-S	600x600	547x547	500x500	32	1369	28

cm2 = Surface d'avalement

