
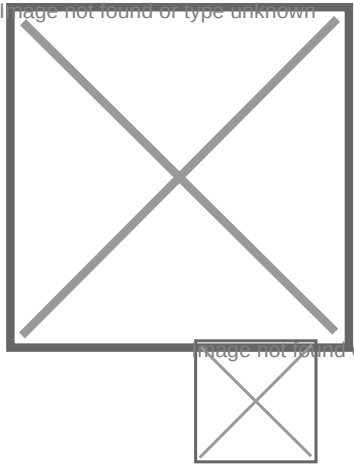


Trappes à dessus fonte


Classe: E 600  
Norme: EN 124

Etanche aux odeurs et eaux de ruissellement  
Verrouillé  
Poignée N° 9115  
Assistance à l'ouverture en option



| REF.          | V x v    | L x l    | H   | Couvercles | kg  |
|---------------|----------|----------|-----|------------|-----|
| 3280-60x60-V  | 600x600  | 770x820  | 150 | 1          | 163 |
| 3280-75x60-V  | 750x600  | 920x820  | 150 | 1          | 191 |
| 3280-122x60-V | 1220x600 | 1390x820 | 150 | 2          | 297 |
| 3280-137x60-V | 1370x600 | 1540x820 | 150 | 2          | 324 |
| 3280-152x60-V | 1520x600 | 1690x820 | 150 | 2          | 352 |
| 3280-184x60-V | 1840x600 | 2010x820 | 150 | 3          | 428 |
| 3280-199x60-V | 1990x600 | 2160x820 | 150 | 3          | 456 |
| 3280-214x60-V | 2140x600 | 2310x820 | 150 | 3          | 485 |
| 3280-229x60-V | 2290x600 | 2460x820 | 150 | 3          | 513 |
| 3280-60x75-V  | 600x750  | 770x970  | 150 | 1          | 197 |
| 3280-75x75-V  | 750x750  | 920x970  | 150 | 1          | 232 |
| 3280-122x75-V | 1220x750 | 1390x970 | 150 | 2          | 361 |
| 3280-137x75-V | 1370x750 | 1540x970 | 150 | 2          | 395 |



N.B. Informations complémentaires aux chapitres 18.62



Trappes à dessus fonte


Classe: E 600  
Norme: EN 124

Etanche aux odeurs et eaux de ruissellement  
Verrouillé  
Poignée N° 9115  
Assistance à l'ouverture en option

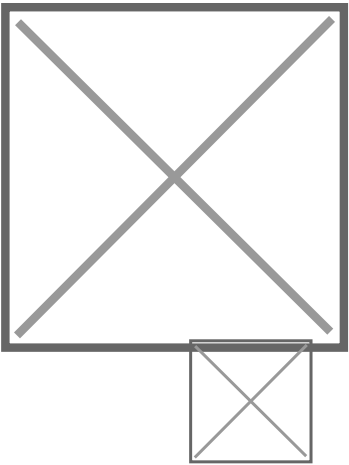

| REF.          | V x v    | L x l     | H   | Couvercles | kg  |
|---------------|----------|-----------|-----|------------|-----|
| 3280-152x75-V | 1520x750 | 1690x970  | 150 | 2          | 429 |
| 3280-184x75-V | 1840x750 | 2010x970  | 150 | 3          | 525 |
| 3280-199x75-V | 1990x750 | 2160x970  | 150 | 3          | 559 |
| 3280-214x75-V | 2140x750 | 2310x970  | 150 | 3          | 594 |
| 3280-229x75-V | 2290x750 | 2460x970  | 150 | 3          | 628 |
| 3280-60x90-V  | 600x900  | 770x1120  | 150 | 1          | 234 |
| 3280-75x90-V  | 750x900  | 920x1120  | 150 | 1          | 255 |
| 3280-90x90-V  | 900x900  | 1070x1120 | 150 | 1          | 304 |
| 3280-122x90-V | 1220x900 | 1390x1120 | 150 | 2          | 430 |
| 3280-137x90-V | 1370x900 | 1540x1120 | 150 | 2          | 450 |
| 3280-152x90-V | 1520x900 | 1690x1120 | 150 | 2          | 470 |
| 3280-167x90-V | 1670x900 | 1840x1120 | 150 | 2          | 521 |
| 3280-182x90-V | 1820x900 | 1990x1120 | 150 | 2          | 568 |

N.B. Informations complémentaires aux chapitres 18.62



Trappes à dessus fonte

Classe: E 600



Norme: EN 124

Etanche aux odeurs et eaux de ruissellement

Verrouillé

Poignée N° 9115

Assistance à l'ouverture en option

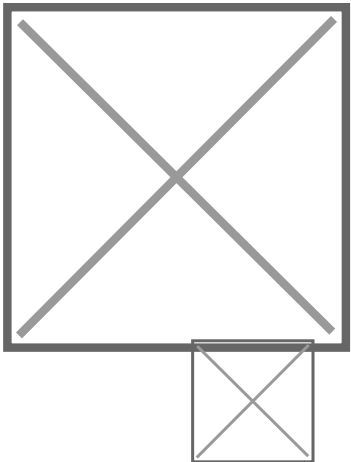

| REF.          | V x v    | L x l     | H   | Couvercles | kg  |
|---------------|----------|-----------|-----|------------|-----|
| 3280-184x90-V | 1840x900 | 2010x1120 | 150 | 3          | 568 |
| 3280-199x90-V | 1990x900 | 2160x1120 | 150 | 3          | 645 |
| 3280-214x90-V | 2140x900 | 2310x1120 | 150 | 3          | 645 |
| 3280-229x90-V | 2290x900 | 2460x1120 | 150 | 3          | 665 |
| 3280-244x90-V | 2440x900 | 2610x1120 | 150 | 3          | 686 |
| 3280-259x90-V | 2590x900 | 2760x1120 | 150 | 3          | 735 |
| 3280-274x90-V | 2740x900 | 2910x1120 | 150 | 3          | 833 |

N.B. Informations complémentaires aux chapitres 18.62

