

Trappes mixtes


Classe: C 250
Rupture: 250 kN

Articulé, verrouillé

Cadre acier galvanisé à chaud

Patins anti-bruit

Sécurité anti-retour à 90°

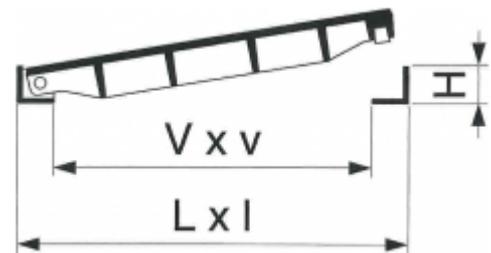

REF.	V x v	L x l	H	Couvercles	kg
6145-53x39-V	527x389	647x509	60	1	41
6145-116x39-V	1161x389	1281x509	60	2	77
6145-88x53-V	884x527	1004x647	60	2	75
6145-138x53-V	1381x527	1501x647	60	3	108
6145-188x53-V	1876x527	1996x647	60	4	142
6145-116x88-V	1161x884	1281x1004	60	2	179
6145-180x88-V	1795x884	1915x1004	60	3	264
6145-243x88-V	2429x884	2549x1004	60	4	347
6145-306x88-V	3062x884	3182x1004	60	5	431

N.B. Clé N° 9140-OTCI

